




Applications:

Parking structures, storage areas, shopping area walkways, entryway, and low level security.

Features

- Sealed die-casting profile for indoor and outdoor applications.
- Voltage is 120-277V & 347V.
- Lumen output from 3000-6700lm with efficacy up to 110 lm/W.
- Polycarbonate optical lens with heat resisting.
- Three 1/2" threaded conduit and one 3/4" conduit entry points.
- Provide with a motion sensor ideal for parking garage and optional for emergency battery.
- Replacing 100W MH and 175W MH.
- Operating temperature is -40°C to 40°C(-40°F to 104°F).
- UL/cUL listed for wet locations, DLC listed as Parking Garage Luminaires.

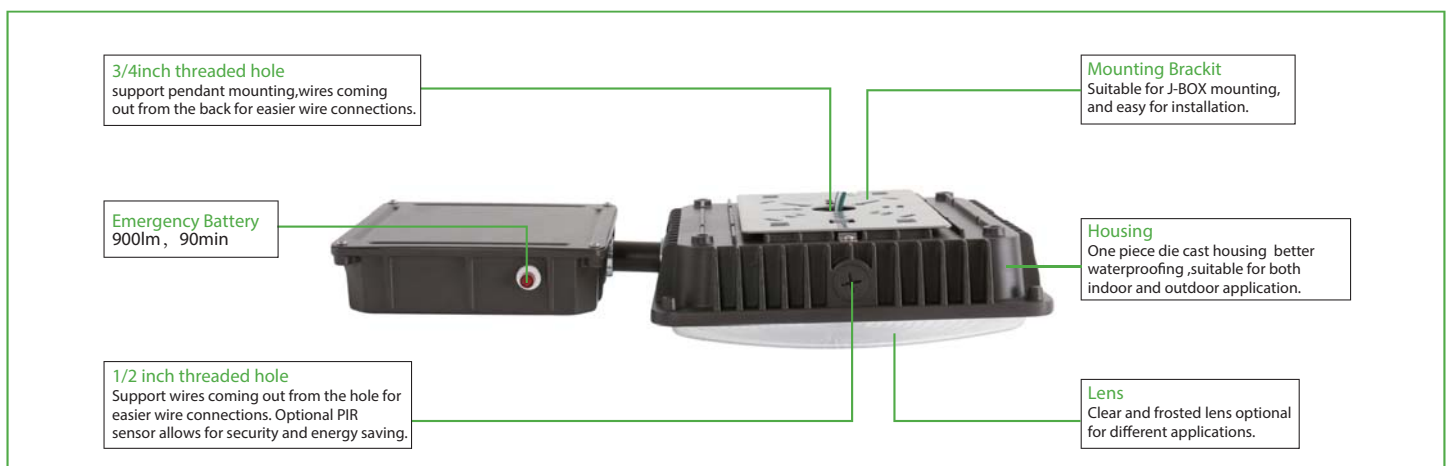

PERFORMANCE DATA

		4000K(70CRI)		5000K(70CRI)	
SYSTEM WATTS	VOLTAGE	LUMENS	LPW	LUMENS	LPW
30W	120-277VAC	3000lm	100 lm/W	3000lm	100 lm/W
45W	120-277VAC	4100lm	91 lm/W	4200lm	93 lm/W
45W	347VAC	4100lm	91 lm/W	4200lm	93 lm/W
50W	347VAC	4100lm	82 lm/W	4200lm	84 lm/W
60W	120-277VAC	6400lm	107 lm/W	6600lm	110 lm/W
65W	120-277VAC	6500lm	100 lm/W	6600lm	102 lm/W
65W	347VAC	6450lm	99 lm/W	6700lm	103 lm/W

ELECTRICAL DATA

Number Of Drivers	Driver Current (mA)	Nominal Power (W)	INPUT VOLTAGE (V)	CURRENT (Amps)
1	740	30	120	0.25
		30	208	0.14
		30	240	0.13
		30	277	0.11
1	980	45	120	0.38
		45	208	0.22
		45	240	0.19
		45	277	0.16
		50	347	0.13
		50	347	0.14
1	1480	60	120	0.50
		60	208	0.29
		60	240	0.25
		60	277	0.22
1	1630	65	120	0.54
		65	208	0.31
		65	240	0.27
		65	277	0.23
		65	347	0.19

DIMENSION



unit: inch/mm

Weight:

30W: 5.11lb (2.32kg)


45W: 5.40lb (2.45kg)

60W/65W: 5.62lb (2.55kg)

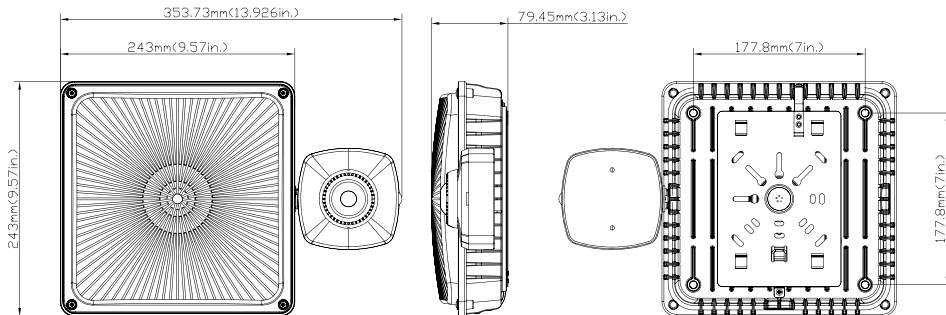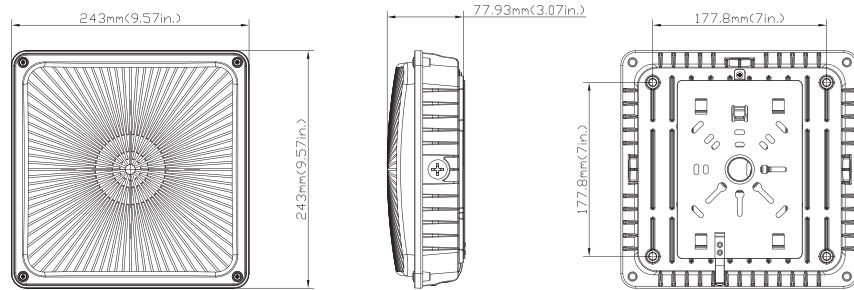

DISTRIBUTION

Parking Garage

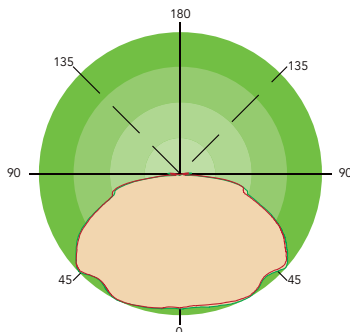

ORDERING GUIDE

Example: CP45W27V40KDMDDB

Fixture Type	Power Consumption	Input Voltage	CCT	Finish	Sensor (Option)	Dimmable(Option)	Backup Battery (Option)
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
CP Canopy Series	30W 30Watts 45W 45Watts 50W 50Watts 60W 60Watts 65W 65Watts	27V 120-277V 34V 347V	40K 4000K 50K 5000K	D Dark Bronze B Black W White	Blank Without Sensor M With Sensor	D 0-10 Dimmable Blank NON Dimmable	B Emergency Battery Blank Without Emergency

Note: 1. The Watt is 45W when the voltage is 120-277V, while when it is 347V, the watt is 50W.
 2. Only the 45W has Emergency options.
 3. 30W and 60W are limited to 120-277V input only.

DLC Model NO.

SYSTEM WATTS	VOLTAGE	CCT	Dimmable	DLC NO.	DLC Classification
45W	120-277V / 347V	4000K	NO	CP45W[2734]V40KX[BLANKM]	Standard
		5000K	NO	CP45W[2734]V50KX[BLANKM]	Standard
		4000K	YES	CP45W[2734]V40KX[BLANKM]D	Standard
		5000K	YES	CP45W[2734]V50KX[BLANKM]D	Standard
60W	120-277V	4000K	NO	CP60W27V40K[B,D,W,SG][Blank,M]	Standard
		5000K	NO	CP60W27V50K[B,D,W,SG][Blank,M]	Standard
		4000K	YES	CP60W27V40K[B,D,W,SG][Blank,M]D	Standard
		5000K	YES	CP60W27V50K[B,D,W,SG][Blank,M]D	Standard
65W	120-277V	4000K	NO	CP65W27V40KYY	Standard
		5000K	NO	CP65W27V50KYY	Standard
		4000K	YES	CP65W27V40KYYD	Standard
		5000K	YES	CP65W27V50KYYD	Standard
	347V	4000K	NO	CP65W34V40KYY	Standard
		5000K	NO	CP65W34V50KYY	Standard
		4000K	YES	CP65W34V40KYYD	Standard
		5000K	YES	CP65W34V50KYYD	Standard