

## Advantage

- Suitable for Ceiling Mount.
- Ideal for Harsh Environment Applications.
- 130 lumens per watt help to reduce pay back period of energy saving.
- Excellent light distribution and uniformity.
- Stainless Steel Clips.
- 50000 hours working time and 5 years warranty.
- Optional 100% DR lens additive for impact resistance.
- Ideal for high moisture areas subject to the possibility of abuse.
- Built-in Constant Current LED Driver with High Efficient LED Module.
- Specilized on the rebate program in North American.



## Common Technical Data

Color Temperature		Input Voltage with ballast	100-277V
Beam Angle	100 degree	Frequency	50/60Hz
Color Consistency		Power Factor	More than 0.99
CRI	More than 80	Rated Life	5 years
Operation Temperature		Led Type	SMT 3030 1.5W Philips Led
Efficiency	More than 130 LPW	Housing	Aluminum
Ip65 Wet Location			UL, cUL and FCC certified

## Ordering Guide

CP	/	100W/120W//150W
Product Code		Wattage


## Warranty

This product has a warranty of period of 5 years from the date of purchase. The warranty is invalid in the case of improper use installation, tampering, and removal of the Q.C. date label, installation in an improper working environment or installation not according to the current edition of the National Electric Code. Should this product fail during the warranty period it will be replaced free of charge, subject to correct installation and return of the faulty unit. James does not accept responsibility for any installation costs associated with the replacement of this product. This warranty is in addition to the statutory rights in your country of purchase. James reserves the right to alter specifications without prior notice.


## Common Technical Data

Model	CP-100W AN50D120	CP-120W AN50D120	CP-150W AN50D120
Power	100W	120W	150W
Lumens	13000	15600	19500
Size(inch)(LxWxH)	14.9'x14.9'x2.0'	14.9'x14.9'x2.0'	14.9'x14.9'x2.0'
Color Temp	3000K,3500K,4000K, 5000K		
Housing	ALum and PC		
Operation Temp	-20°C to 45°C		
Life Span	50, 000 hours		
Driver	High efficiency meanwell driver		
Voltage range	AC100-277V		
Frequency	50/60Hz		
Beam Angle	100°		
CRI	>80		
PF	≥0.95		
Power Efficiency	≥90%		

## Dimension

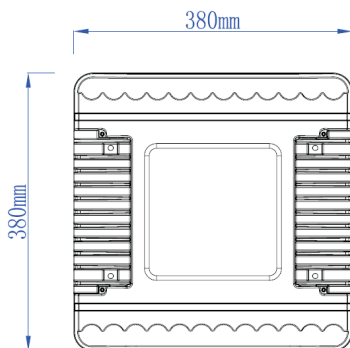

100W-130W

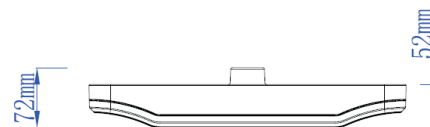

150W