



Two color options ■ ■

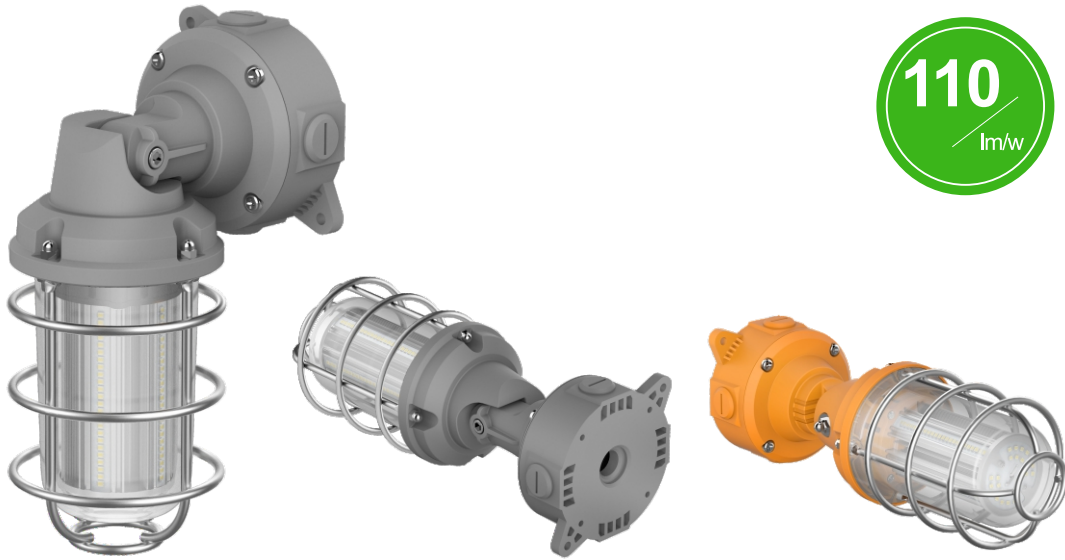

### ADVANTAGE

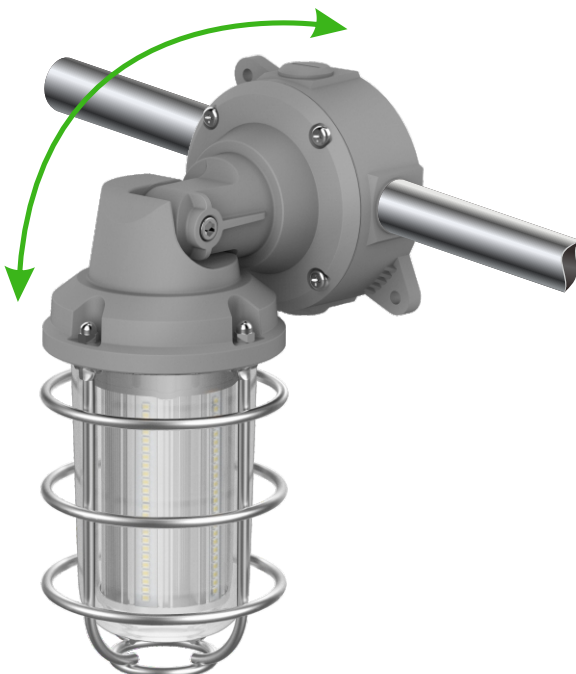

Suitable for wet location (outdoor)



90-180 degree adjustable




No dark area




perfect design for wire pipe through



## REPLACE

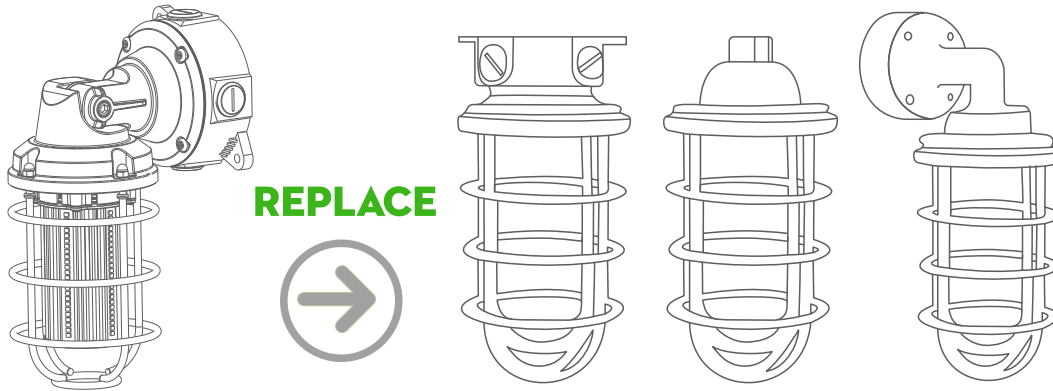

## DIMENSIONS

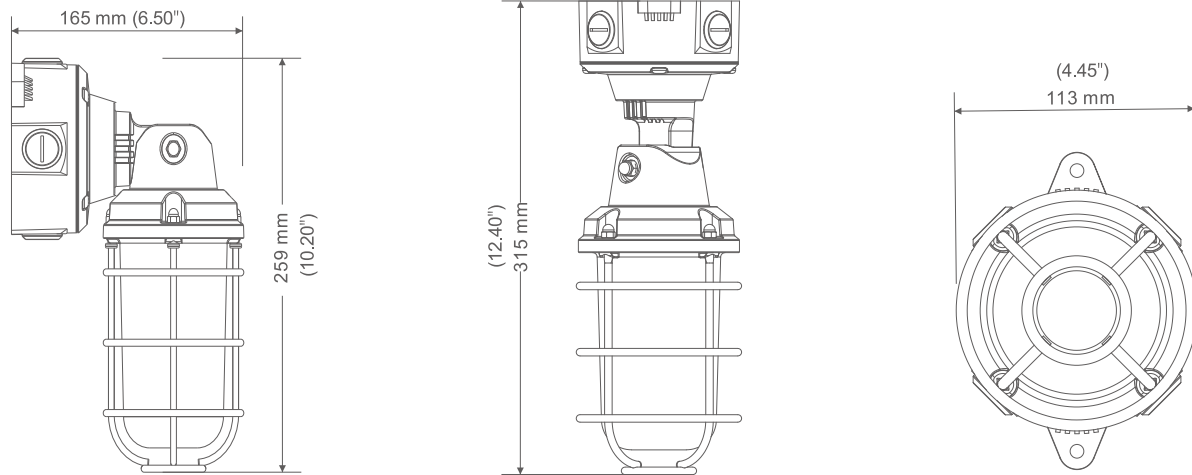


## PARAMETER

Model No.	Power	Led Qty	PF	CRI	Voltage	CCT	Lumen	Size(inch) 1inch=25.4mm	Operate temperature (°C/°F)	Weight(kg) 1kg=2.2lbs	Certificate	Equal to
SUN-GKT15-20W	20W ± 10%	144pcs	≥ 0.9	≥ 80	100-277V AC 50-60Hz	2700-6000K	2200lm ± 200	180°: Φ113x315mm Φ4.45"x12.40" 90°: Φ165x259mm Φ6.50"x10.20"	-40~45°C -40~113°F	NW:1.10kg NW:2.43lb GW:1.20kg GW:2.65lb	IP65	200W CFL/HID




## APPLICATION

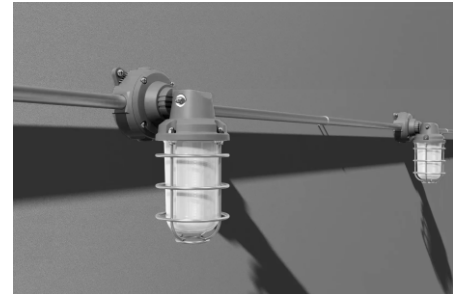

## PACKING

watt	Inner box size 1inch=25.4mm	N.W per lamp 1kg=2.2lbs	G.W per box 1kg=2.2lbs	G.W per carton 1inch=25.4mm	Carton size 1inch=25.4mm	Quantity per carton
20W	325x120x120mm 12.80"x4.72"x4.72"	2.43lb (1.10kg)	2.65lb (1.20kg)	17.20lb (7.80kg)	370x340x265mm 14.57"x13.39"x10.43"	6PCS

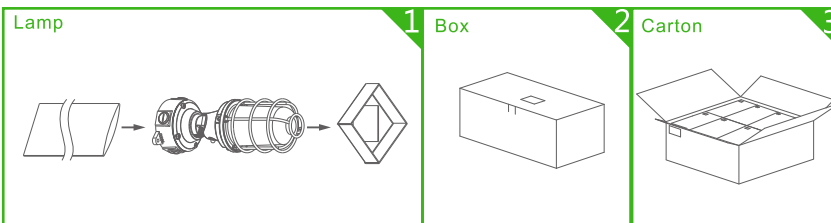

PACK QUANTITY: **6PCS**



## ⚠ CAUTIONS

- This Lamp is non-dimmable, do not connect with dimmer, timer or other control device.
- Don't take apart the lamps without our permit.
- Please read the instruction manual carefully before installation.