

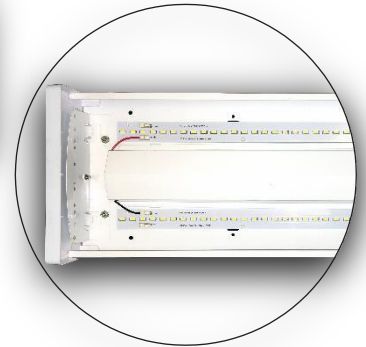
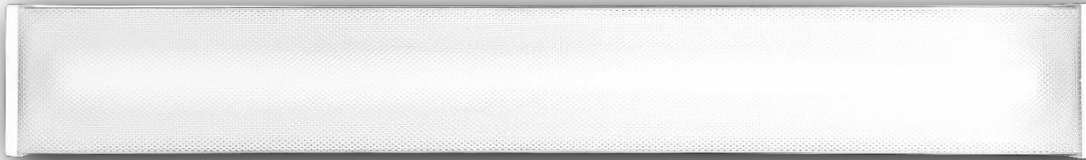


The LED Wrap Light is the ideal replacement for existing fluorescent wrap lights. The Wrap Light offers an exceptional illumination perfect for a variety of settings such as shopping malls, offices, hospitals and classrooms.



DIMENSIONS



CERTIFICATIONS



FEATURES

- Suitable for ceiling mount or suspended mount
- Ideal for harsh environment applications
- 0-10V Dimmable Driver
- Special wrap diffuser design
- Minimize labor and recycling costs
- Excellent light distribution and uniformity
- 5 Year Manufacturer's Warranty

COMMON TECHNICAL DATA

Color Temperature	3000K-5000K
Beam Angle	120° degrees
CRI	>80
Operation Temperature	-22°F to 104°F
Lumen Efficiency	More than 130 LPW
Input Voltage	100-277VAC
Frequency	50-60Hz
Power Supply Efficiency	90%
Rated Life	50,000 hours
Power Factor	More than 0.99
LED Type	SMT 2835
Housing	Aluminum & Plastic

WARRANTY

This product has a warranty for a period of 5 years from the date of purchase. The warranty is invalid in the case of improper installation, tampering, or removal of the Q.C. date label. Installation in an improper working environment or installation not according to the current edition of the National Electric Code also invalidates the warranty. Should this product fail during the warranty period, it will be replaced free of charge, subject to correct installation and return of the faulty unit. Ecomax does not accept responsibility for any installation costs associated with the replacement of this product. This warranty is in addition to the statutory rights in the country of purchase. Ecomax reserves the right to alter specifications without prior notice.

PRODUCT SPECIFICATION


Model Number	Length (FT)	Wattage	Color	Lumens	Input Voltage
ZY-STAP4FT36W	4FT	36W	4000-5000K	4680 lm	100-277 VAC

ORDERING GUIDE

ZY Company Code	STAP Housing Type	4FT Length	36W Wattage
--------------------	----------------------	---------------	----------------

MOUNTING OPTIONS

*Ceiling Mount or Suspended Mount



WIRING CONNECTION

*Before connection: Please open cover, discard packaging materials, then secure shut cover.

