



No Flicker



DIMMABLE



50000 Hrs



ECOMAX

LIGHTING



Master B - Pendant Series

- 3000K/4000K/5000K
- CRI 90+




SPECIFICATIONS

Efficacy(lm/W)	90lm/w
CCT	3000K/4000K/5000K
CRI	90+
Reflector Color	Black/White/Silver
LED Brand	OSRAM
Operation Temp	-20°C - +40°C
Beam Angle	15D/30D/45D
IP Range	IP65


Products Dimensions

Master A series

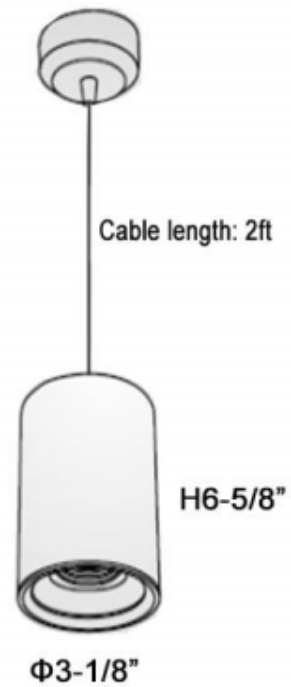

Master Pendant 20W

Products Details

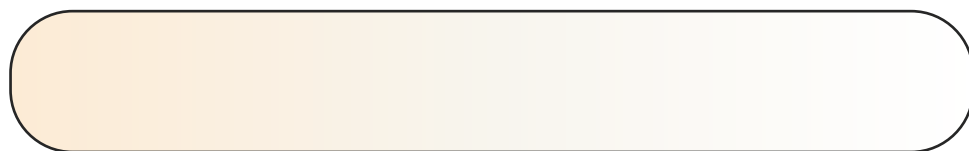

3000K

4000K


5000K



Item Number	Luminous Efficacy	Input Voltage	Lumen	Watts
YG036C15-R-3C-BK-P-DM	90lm/w	AC120-277V	1350lm	15W
YG036C20-R-3C-BK-P-DM		AC120-277V	1800lm	20W
YG036D30-R-3C-BK-P-DM		AC120-277V	2700lm	30W
YG036E40-R-3C-BK-P-DM		AC120-277V	3600lm	40W
YG036C20-R-3C-BK-S-DM		AC120-277V	1800lm	20W
YG036D30-R-3C-BK-S-DM		AC120-277V	2700lm	30W
YG036E40-R-3C-BK-S-DM		AC120-277V	3600lm	40W
YG036CC15-S-3C-BK-P-DM		AC120-277V	1350lm	15W
YG036CC20-S-3C-BK-P-DM		AC120-277V	1800lm	20W
YG036DD30-S-3C-BK-P-DM		AC120-277V	2700lm	30W
YG036CC20-S-3C-BK-S-DM		AC120-277V	1800lm	20W
YG036DD30-S-3C-BK-S-DM		AC120-277V	2700lm	30W


ECOMAX LIGHTING

Master B series---Size-Round

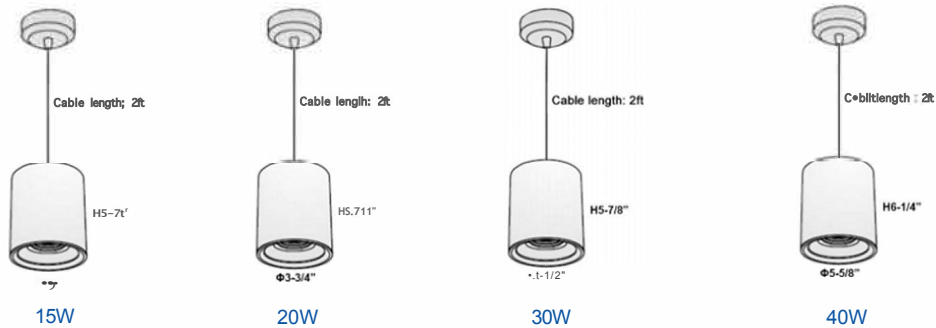


Tips: considering the Octagon Box length 91.44mm(3.6\"), so, for the surface mounted to North America market, we just recommending from Diameter 3.75\"(95mm) type.Surface mounted Diameter 3\"(75mm) type can be made If you could Install, Just decrease US\$5.00/unit on the basis of 3\"(75mm) pendant type.


Master B series---Size-Square

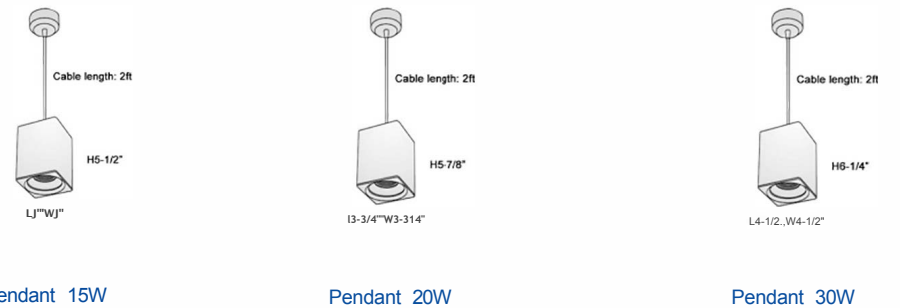


Tips: considering the Octagon Box length 91.44mm(3.6\"), so, for the surface mounted to North America market, we just recommending from 3.75\"(95mm) type.Surface mounted 3\"(75mm) type can be made if you could install, just decrease USD5.00/unit on the basis of 3\"(75mm) pendant type.

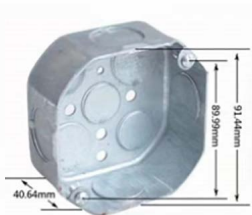

Octagon Box



20W




30W




40W



Octagon Box

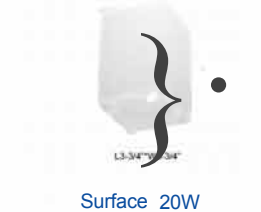

Surface 20W



Surface 30W