



FH06W-P5-G1Y 30Z8x 24V80S4 W10L05




- 5 years warranty@Ta≤85°C
- 3 years warranty@Ta≤100°C
- High temperature and high storage condition,
- Ta:-30-100°C, apply to bathroom, sauna,

TECHNICAL DETAILS


Product No.	FH06W-P5-G1Y 30Z8x 24V80S4 W10L05
Power	6W/M 1.82W/ft
Voltage	DC24V
CRI	80
Led Qty	80LEDs/M
Length/Reel	5M
Voltage Range	23 ~24V dc
Reverse Voltage	24V dc

LIGHT DISTRIBUTION

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

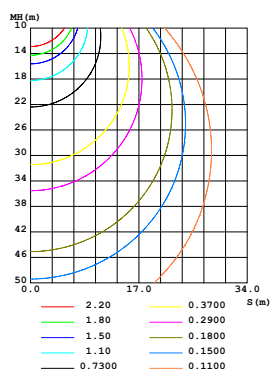


LUMENS PER METER

Color Temperature

2700K	1010lm/m
3000K	1050lm/m
4000K	1110lm/m
5000K	1140lm/m
6000K	1140lm/m

DIMENSION

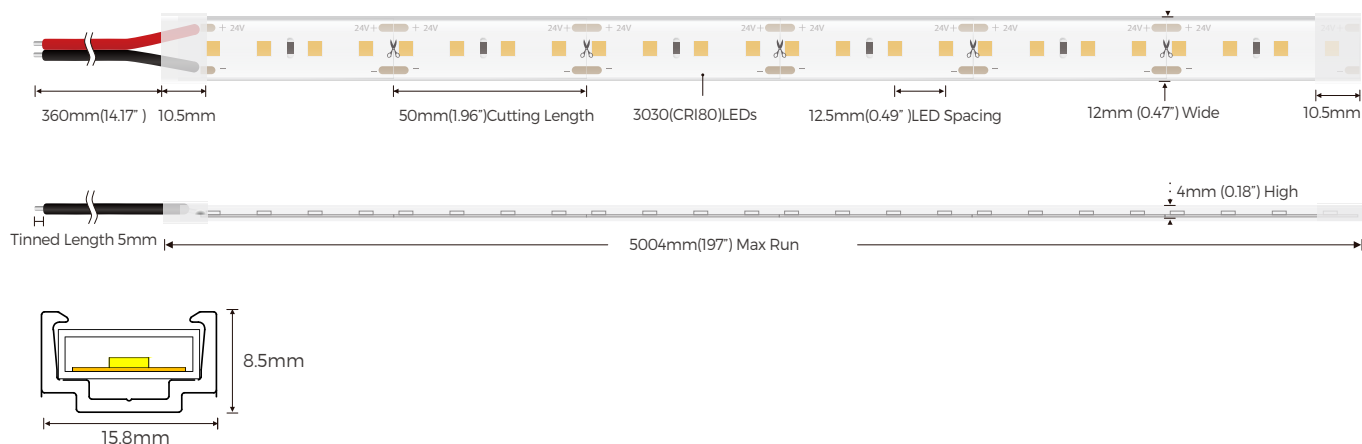


ACCESSORIES

Name	Quantity
① Cap	5pc
② Clips	10pc
③ Screw	20pc
④ Glue	1pc




POWER CONNECTION DIAGRAM

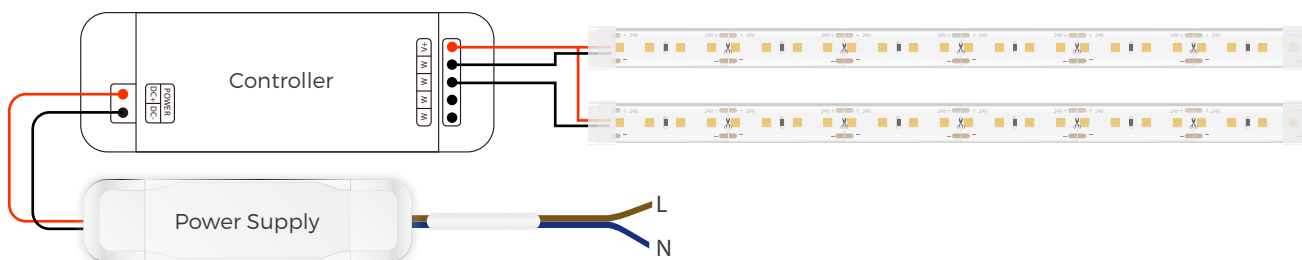

RECOMMENDED POWER SUPPLIES

Item Number	Description	Input Voltage	Output Voltage	Dimmable	Dimensions(L*W*H)
DVH30-24-P0-G1 CP PC	Non-waterproof driver 30W	220-240	DC24V 1.25A	NO	160×42×30mm
DVH60-24-P0-G1 CP PC	Non-waterproof driver 60W	220-240	DC24V 2.5A	NO	187×45×30.5mm
DVH75-24-P0-G1 CP PC	Non-waterproof driver 75W	220-240	DC24V 3.125A	NO	187×45×30.5mm
DVH120-24-P0-G1 CP PC	Non-waterproof driver 120W	220-240	DC24V 5.0A	NO	268×45×30.5mm
DVH150-24-P0-G1 CP PC	Non-waterproof driver 150W	220-240	DC24V 6.25A	NO	268×45×30.5mm

INSTALLATION

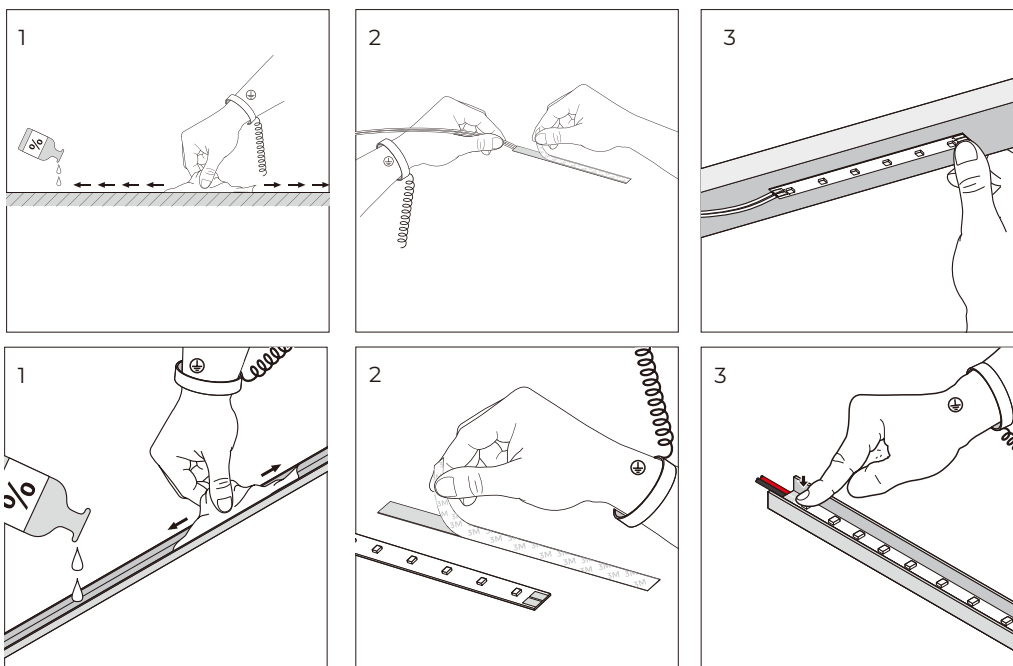

Light strip installation

Clean the environment part to be attached with a cloth, as shown in Figure 1, and then tear off the 3M tape on the back of the light belt, and finally stick the light belt on the clean place.

Aluminum profile installation

Clean the environment part to be attached with a cloth, as shown in Figure 1, and then tear off the 3M tape on the back of the light belt, and glue the light strip inside the aluminum profile.

PACKING

N.W /CTN(KG)	G.W/CTN(KG)	QTY / CTN(reel)	CTN Size(mm)
/	/	/	/

The packing diagram illustrates the packaging process. It starts with a reel of light strip, which is then placed into an open cardboard box. Finally, the box is closed and sealed.