

## Outdoor Sign Lighting and Wall Washer



### ► PRODUCT FEATURES

- Onboard controller on each fixture enables independent selection of simple colors, color changing effects and step dimming.
- DMX512 & RDM Control.
- Rotatable mounting hardware optional.
- Impact and heat resistant tempered glass.
- Outdoor linear fixture that evenly illuminate flat and embossed surfaces.

### ► Applications

- Billboards
- Sign lighting
- Wall washing

# Outdoor Sign Lighting and Wall Washer

## ELECTRICAL SPECIFICATIONS

Input Voltage	120-277VAC
CRI	80+
Beam Angle	120° or 30x85°
Fixture Rotation	180°
Control	DMX512&RDM
Max DMX connections	30fixtures
Environment	IP66
Operating Temperature	-40°F to 122°F
Lamp Life	50,000 hours
Warranty	5 Years

## FIXTURE DATA SHEET

Part Number	Length	Watt	Color	Beam Angle	Lumens(lm)	Efficacy(lm/w)
BW-WW-10W	2ft	10W	White	120°	1100	110
				30x85°	800	80
BW-WW-12RGBW	2ft	12W	RGBW	120°	660	55
				30x85°	540	45
BW-WW-20W	4ft	20W	White	120°	2200	110
				30x85°	1600	80
BW-WW-25RGBW	4ft	25W	RGBW	120°	1375	55
				30x85°	1125	45

## ACCESSORIES



Rotatable Bracket



Extended Arm



6' long 3 wire  
input cord



1' long daisy chain



Termination Resistor




DMX 512 Control Box  
& Remote Control




DMX512 DJ controller

# Outdoor Sign Lighting and Wall Washer

## DIMENSIONS

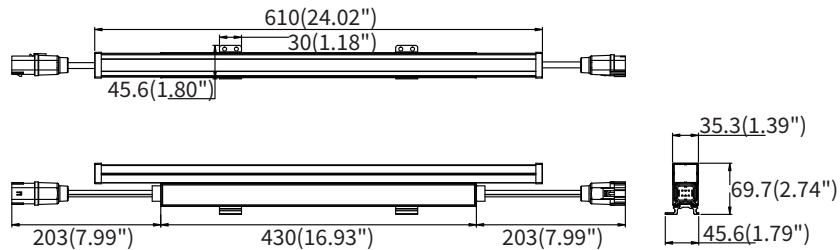


2ft

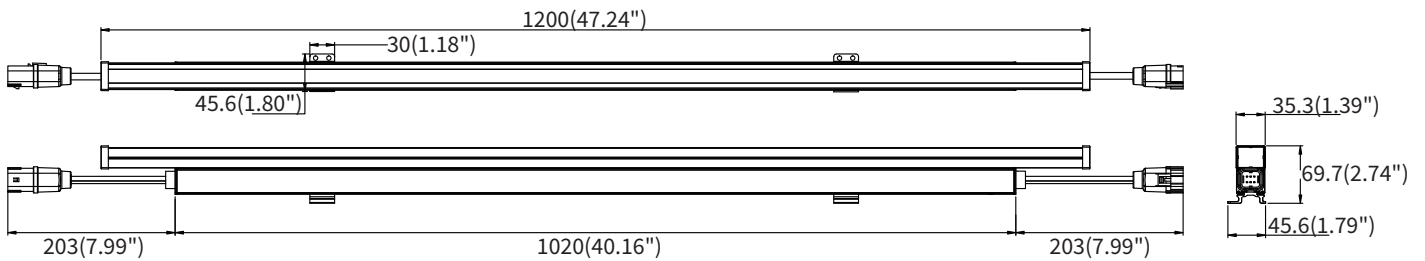


4ft

## LIGHT DISTRIBUTION

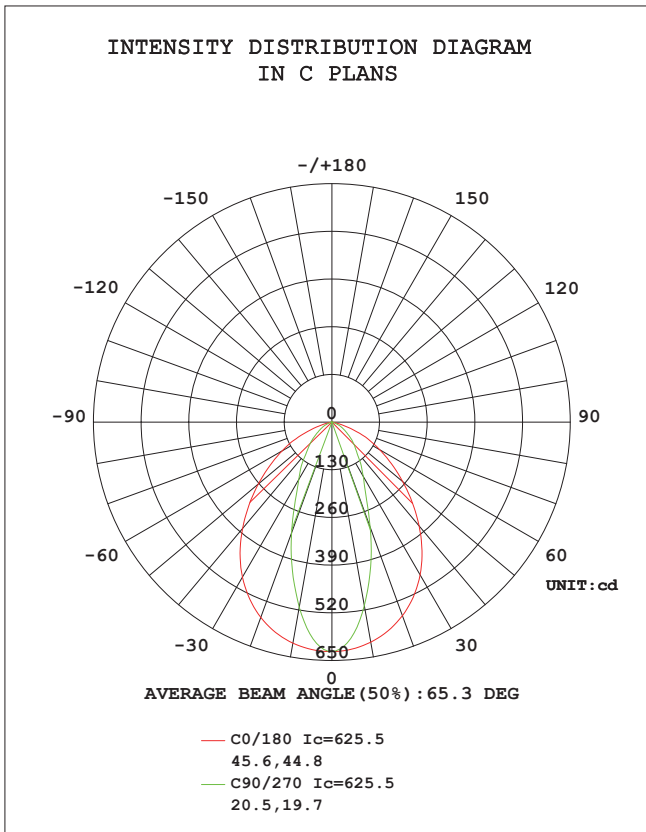

30x85°

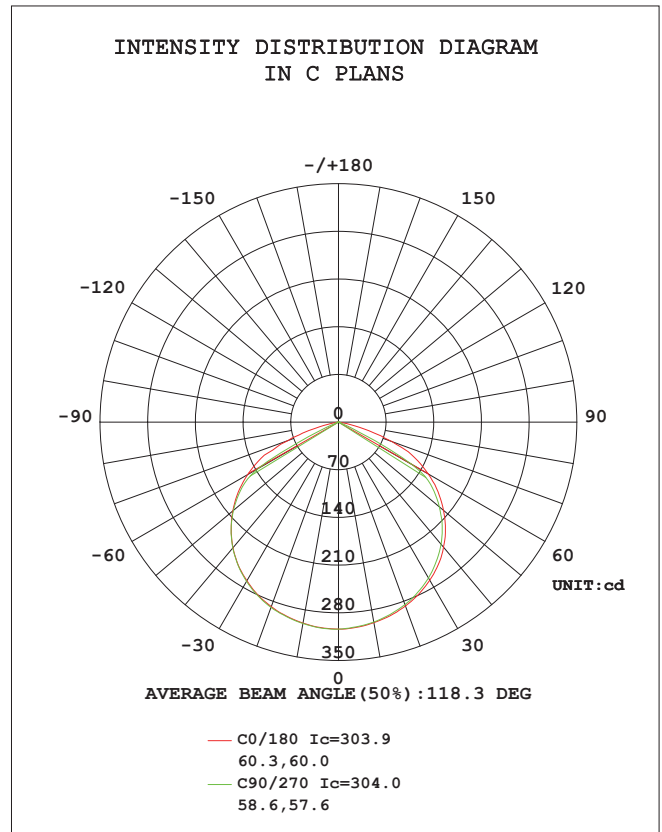


120°



# Outdoor Sign Lighting and Wall Washer

## DMX WIRING


- Connect additional luminaires

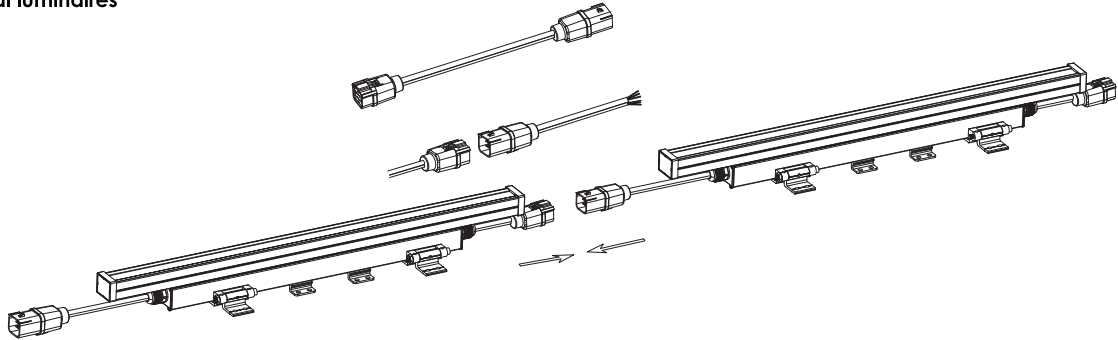

- Connect the Leader Cable

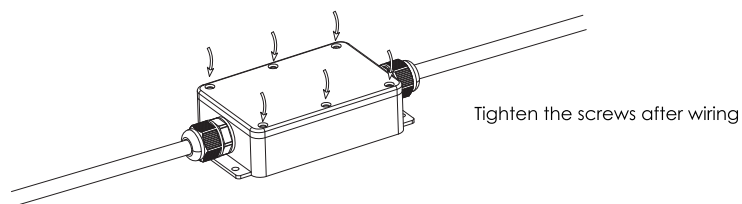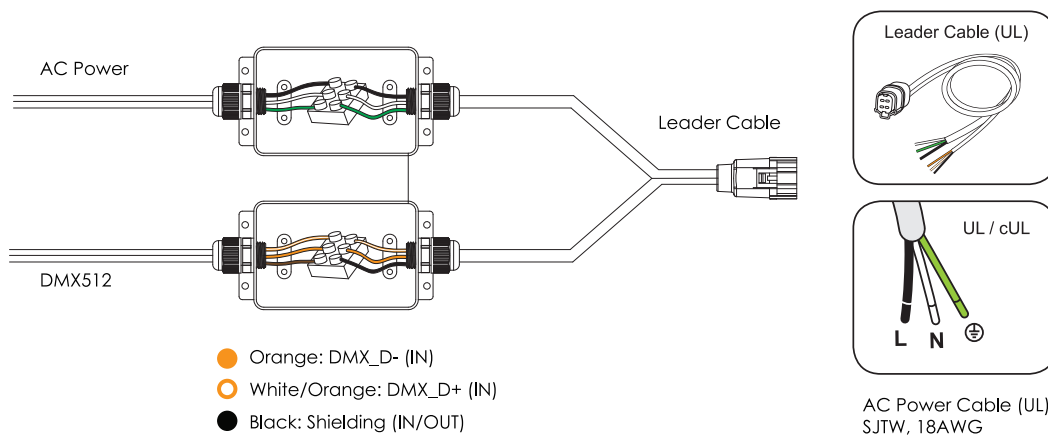

- Attach safety cable (Optional, not included)



# Outdoor Sign Lighting and Wall Washer

## CATALOG NUMBER BREAKDOWN

# BW2FT-10-X-120-BK-X

1

2

3

4

5

6

7

1 Bestwon

3 Wattage

5 Beam Angle

7 Accessories

2 Length

4 Color

6 Finish

### 2 Length

2FT	2FT Wall Washer
4FT	4FT Wall Washer

### 5 Beam Angle

120	120°
30x85	30x85°

### 3 Wattage

10	10W
12	12W
20	20W
25	25W

### 6 Finish

BK	Black
SV	Silver
Wh	White

### 4 Color

WW	Warm White/3000K
NW	Neutral White/4000K
CW	Cool White/5000K
RGBW	Red,Green,Blue,White

### 7 Accessories

Blank	None
DMX512	DMX512